

PART NUMBER

**KFL177607**

REV.

DATE

COMMENTS

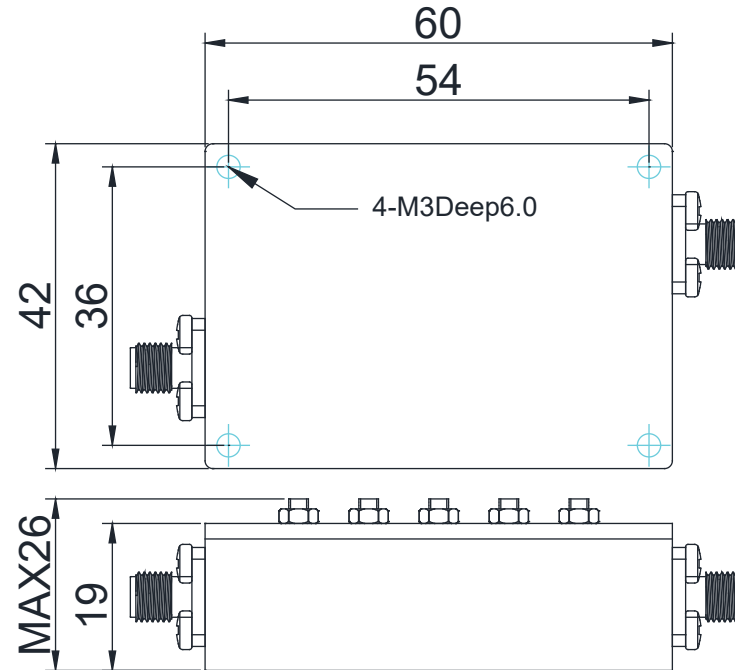
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Pass band	2,496~2,960MHz
Rejection	$\geq 60\text{dB}$ @ DC-2,252MHz $\geq 60\text{dB}$ @ 2,934-6,000MHz
Insertion Loss	$\leq 1.0\text{dB}$
Ripple in Band	$\leq 1.0\text{dB}$
Return Loss	$\geq 20\text{dB}$
Average Power	$\leq 20\text{W}$

**Mechanical Data**

Operational Temperature	-15 to +45 $^{\circ}\text{C}$
Storage Temperature	-45 to +85 $^{\circ}\text{C}$

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm ( $\pm 0.3\text{mm}$ )**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KFL177607**

DESCRIPTION

**Filter, Bandpass, SMA Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Plating**  
Black Paint

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.