Р	Δ	R٦	Г	N	IJ	M	IR	F	F

KIMP177421

REV.		INITIAL


Electrical Data

Impedance 75 Ω Nominal (Female Side) 50 Ω Nominal (Male Side)

Frequency Range DC - 3 GHz **Insertion Loss** 5.7 dB Nominal **VSWR** 1.4:1 Max. **Input Power** 1 Watt Average

REV.		INITIAL

RoHS Compliant

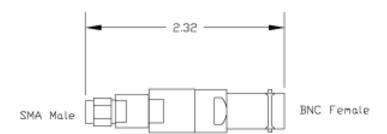

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

H Konnect RF

WWW.KONNECTRF.COM 540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

KIMP177421	DESCRIPTION Impedance Matching Pad - BNC Female Jack 75 Ohms to SMA Male Plug 50 Ohms
CAGE CODE SIGNATURE /	
664U0 X	<u>.</u>
THIS DRAWING INCLUDING THE	
DESIGNS IS THE PROPERTY OF	
KONNECT RF AND IS NOT TO	
BE USED FOR ANY PURPOSE	
WITHOUT OUR APPROVAL.	