## **KIMP177422**


REV.		INITIAL

## **Electrical Data**

Impedance 50 Ω Nominal (Female Side)

75 Ω Nominal (Male Side)

Frequency Range DC - 3 GHz
Insertion Loss 5.7 dB Nominal
VSWR 1.4:1 Max.
Input Power 1 Watt

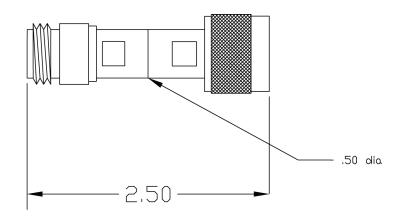

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

## **H** Konnect RF

540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

DESCRIPTION	Impedence Matching Pad - N Male Plug 75 Ohms to N Female Jack 50 Ohms
	DESCRIPTION