

PART NUMBER

KIS177014

REV.

DATE

COMMENTS

INITIAL

Electrical Data

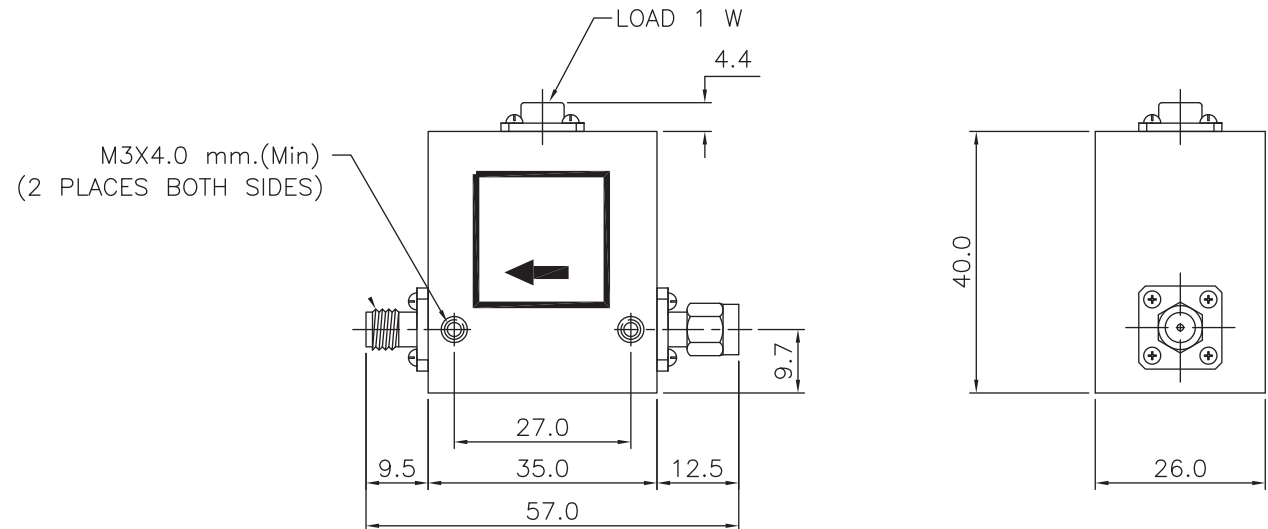
Impedance	50 Ω
Frequency Range	1-1.2 GHz.
Isolation	20dB
Insertion Loss	0.40 dB
VSWR	1.25 Max

Mechanical Data

Operating Temperature: -30°C - 70 °C

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	22
Insertion Loss dB (Max.) :	0.35
VSWR (Max.) :	1.17

Peak Power : 100 W

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177014

DESCRIPTION

Isolator, SMA Male Plug Input/ SMA Female Jack Output

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.