

PART NUMBER

KIS177018

REV.

DATE

COMMENTS

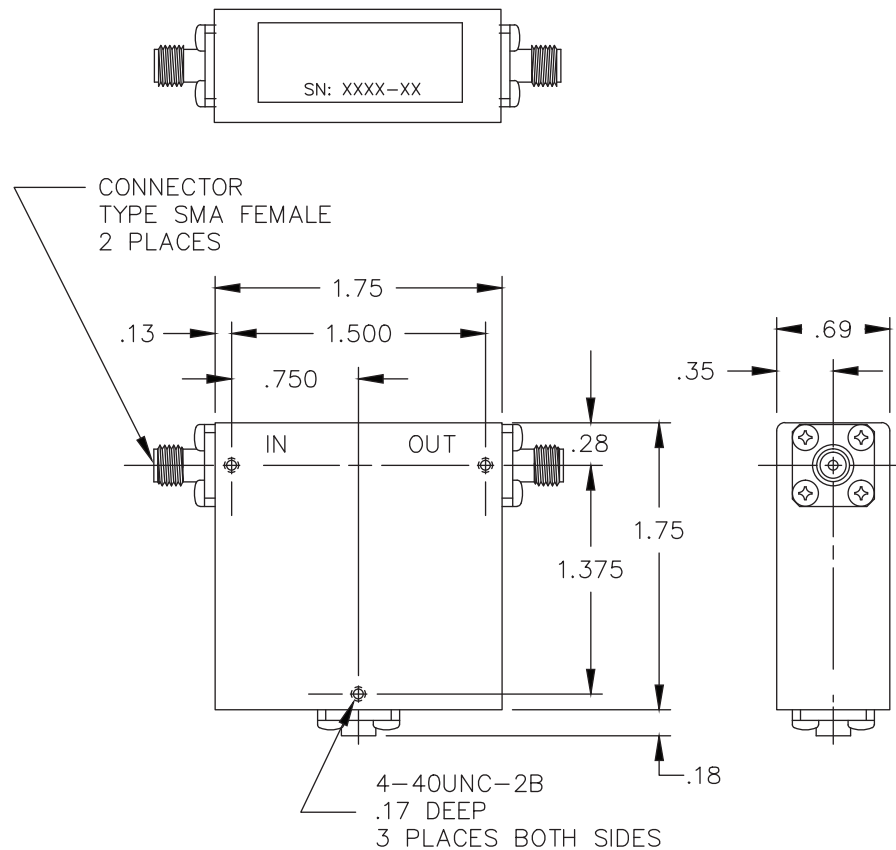
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	2.0-4.0 GHz.
Insertion Loss	0.4 dB Max
Isolation	20 dB Min
Power	100w PK/50w AVG FWD, 10W AVG REV.
VSWR	1.25 Max

Mechanical Data

Temperature Range: -0 °C - 85 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177018

DESCRIPTION

Isolator,S Band, SMA Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.