

PART NUMBER

KIS177029

REV.

DATE

COMMENTS

INITIAL

Electrical Data

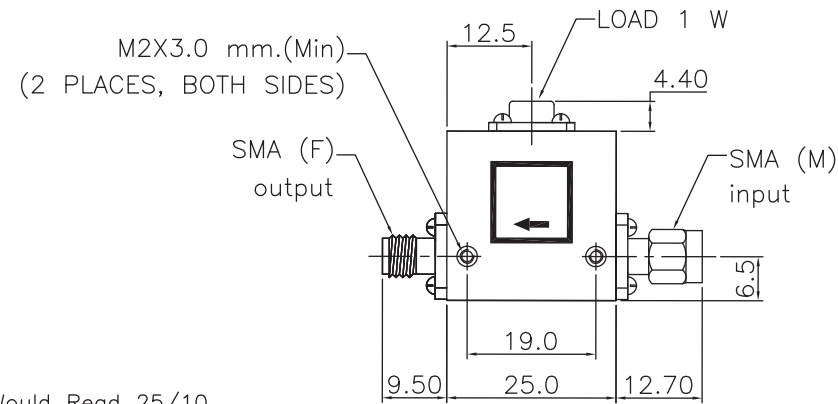
Impedance	50 Ω
Frequency Range	3400-3600 GHz.
Isolation	23dB Min
Insertion Loss	0.40dB
VSWR	1.15Max

Mechanical DataOperating Temperature Range: 25 °C \pm 5 °C

Spec: Forward Power : 25 W CW

Reverse Power : 1 W CW

Note: Date Code Example : Week 25 in 2010 We Would Read 25/10

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177029

DESCRIPTION

Isolator, SMA Male Plug Input, SMA Female Jack Output

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.