

PART NUMBER

**KIS177033**

REV.

DATE

COMMENTS

INITIAL

RoHS Compliant




**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	25.50- 27 GHz
Insertion Loss	1.00 dB Max
VSWR	1.30
Isolation	20 dB Min
Average Power	1 Watt

**Mechanical Data**

Temperature Range -10 °C - 60 °C

2-56UNC X 3.50 mm.(Min)

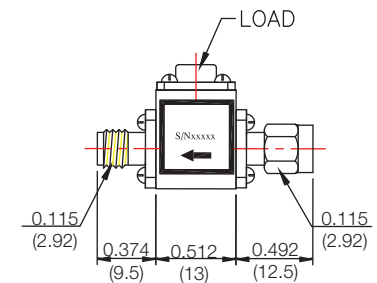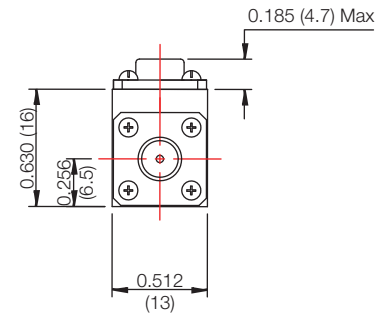

Room Temp :	+25 $\pm$ 5°C
Isolation dB ( Min. ) :	22
Insertion Loss dB ( Max. ) :	0.90
VSWR ( Max. ) :	1.19

**Drawing not to scale. Dimensions for reference only****Units: inches (mm)****Konnect RF**

**WWW.KONNECTRF.COM**  
**1-800-790-5887**

PART NUMBER

**KIS177033**

DESCRIPTION

**Isolator, 2.92 mm Male Plug to Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Aluminum

**Plating**  
Nickel

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.