

PART NUMBER

**KIS177149**

REV.

DATE

COMMENTS

INITIAL

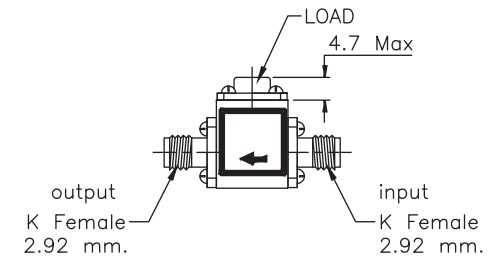


**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	20.00-30.00 GHz.
Isolation	18dB Min
Insertion Loss	0.70 dB
VSWR	1.40

**RoHS Compliant****Mechanical Data**Operating Temperature 25°C $\pm$  5 °C

Forward Power : 1 W

Reverse Power : 1 W

2-56UNC X 3.50 mm.(Min)  
(2 PLACES)

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KIS177149**

DESCRIPTION

**Isolator, 2.92mm Female Input, 2.92mm Female Output, 20-30 GHz**

CAGE CODE

**664U0**

SIGNATURE

X

Component  
BodyMaterial  
AluminumPlating  
NickelTHIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.