

PART NUMBER

KIS177177

REV.

DATE

COMMENTS

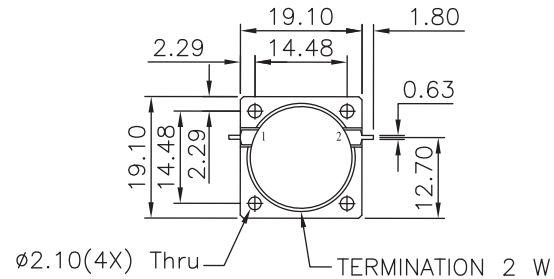
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range 3.400 - 4.200GHz.
 Isolation 20dB Min
 Insertion Loss 0.40dB Max
 VSWR 1.20 Max

Mechanical Data

Operating Temperature: -20 °C - 85 °C

RoHS Compliant

TAB .13±.04 THK
 BERYLLIUM COPPER
 GOLD PLATED (2 PL)

NOTE : Forward Power : 50 W
 Reverse Power : 2 W

Drawing not to scale. Dimensions for reference only

Units:mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177177

DESCRIPTION

Flange Mount Isolator, 3.4-4.2 GHz, 20 dB Isolation

CAGE CODE

664U0

SIGNATURE

X

Component
 Body

Plating/Finish
 Black Paint

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.