

PART NUMBER

KIS177212

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	3.5 - 4.5 GHz.
Insertion Loss	\leq 0.5 dB
Reverse Isolation	\geq 17 dB
Power Rating	10W
Reverse Power	10 W
VSWR	\leq 1.30

RoHS Compliant**Mechanical Data**

Temperature Range: -10 °C - 60 °C

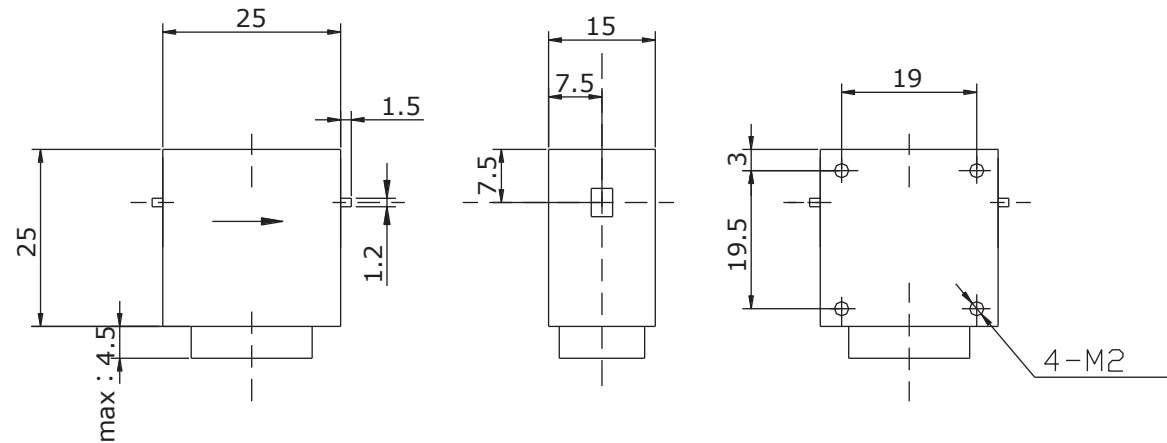

Drawing not to scale. Dimensions for reference only

Units: (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177212

DESCRIPTION

Isolator, Stripline

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.