

PART NUMBER

KIS177222

REV.

DATE

COMMENTS


INITIAL

Electrical Data

| | |
|-----------------|----------------|
| Impedance | 50 Ω |
| Frequency Range | 7 - 9 GHz. |
| Insertion Loss | ≤ 0.50 dB |
| Isolation | 40 dB Min. |
| Average Power | 10 Watts |
| VSWR | ≤ 1.25 |

RoHS Compliant**Mechanical Data**

Temperature Range: -45 °C - 85 °C

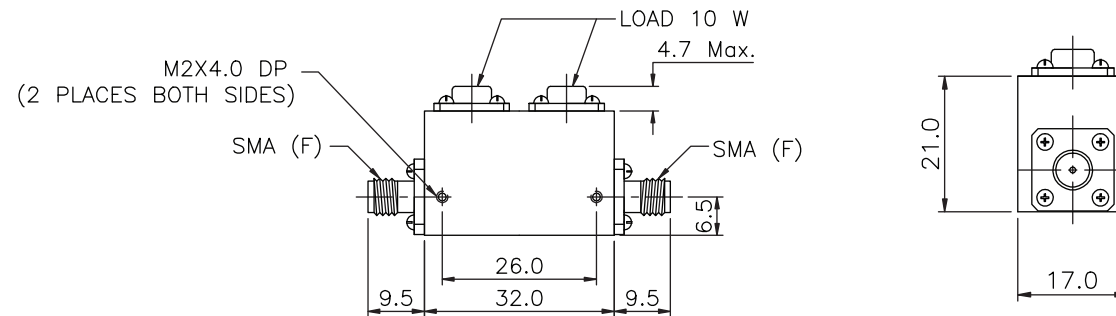

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177222

DESCRIPTION

**Double Isolator, SMA Female Jack
Input, SMA Female Jack Output**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.