

PART NUMBER

KIS177231

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range 7 - 12.4 GHz.
 Insertion Loss ≤ 0.60 dB max.
 Isolation 20 dB min.
 Average Power 1 Watt
 VSWR ≤ 1.25

RoHS Compliant**Mechanical Data**

Temperature Range: -20 °C - 70 °C

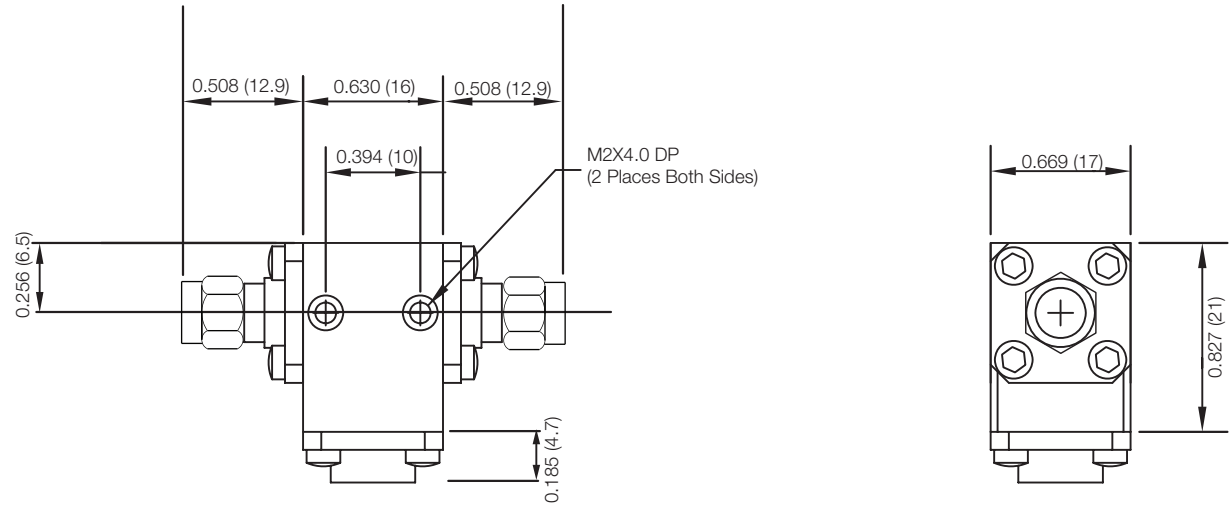

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177231

DESCRIPTION

Isolator, SMA Male Plug Input, SMA Male Plug Output

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component
 Body

Finish
 Black Paint