

PART NUMBER

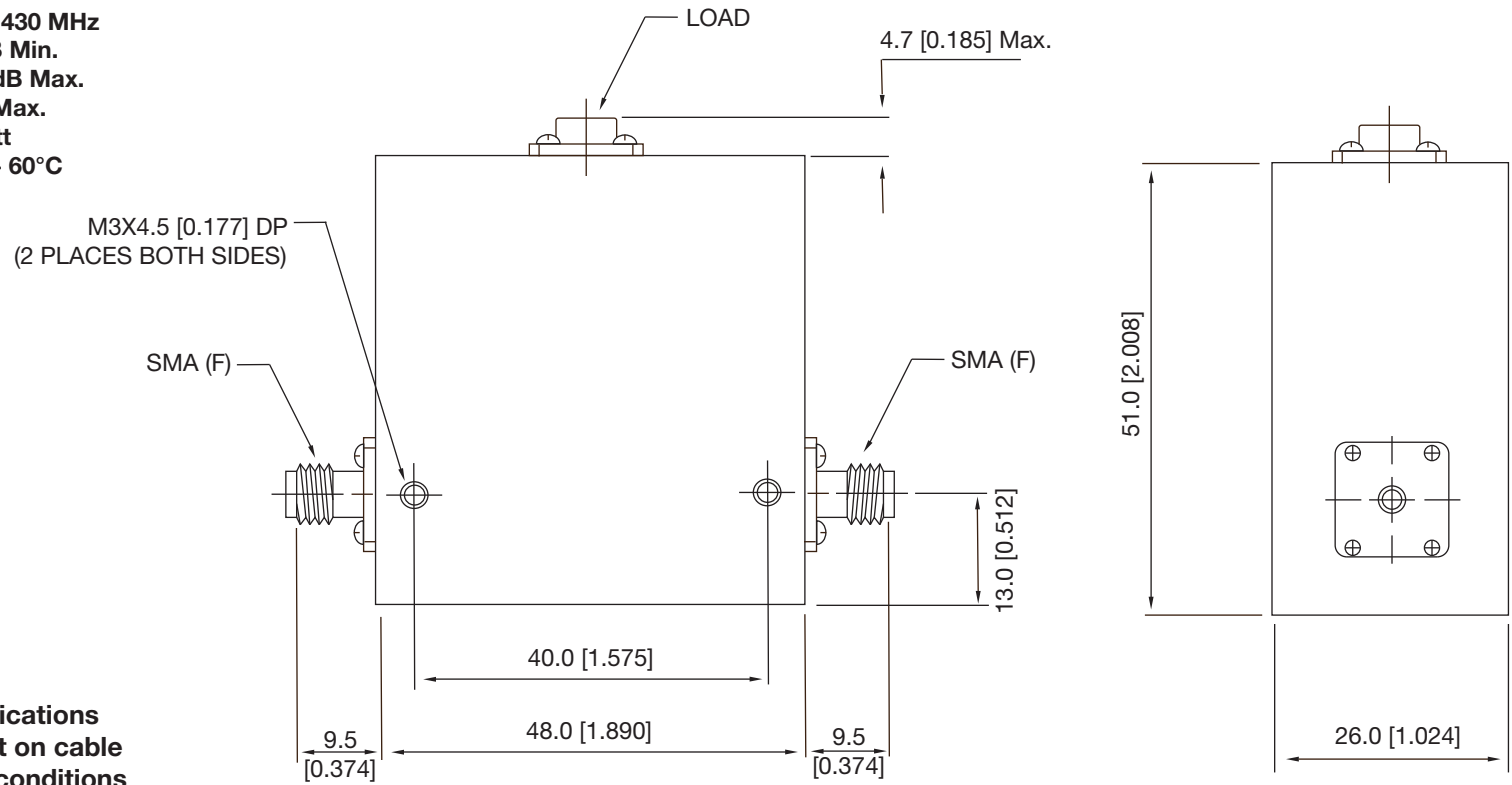
KIS177241

REV.

INITIAL

Electrical Data

Frequency Range	380 - 430 MHz
Isolation	18 dB Min.
Insertion Loss	0.40 dB Max.
VSWR	1.30 Max.
Forward Power	1 Watt
Operating Temperature	0 to + 60°C

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
540 NW University Blvd. Ste. 109
Port Saint Lucie, Florida, 34986
1-800-790-5887

PART NUMBER

KIS177241

DESCRIPTION

**Isolator - SMA Female Jack Input
SMA Female Jack Output**

CAGE CODE

664U0

SIGNATURE

X

Materials

Body

Aluminum

Black Painted

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.