

PART NUMBER

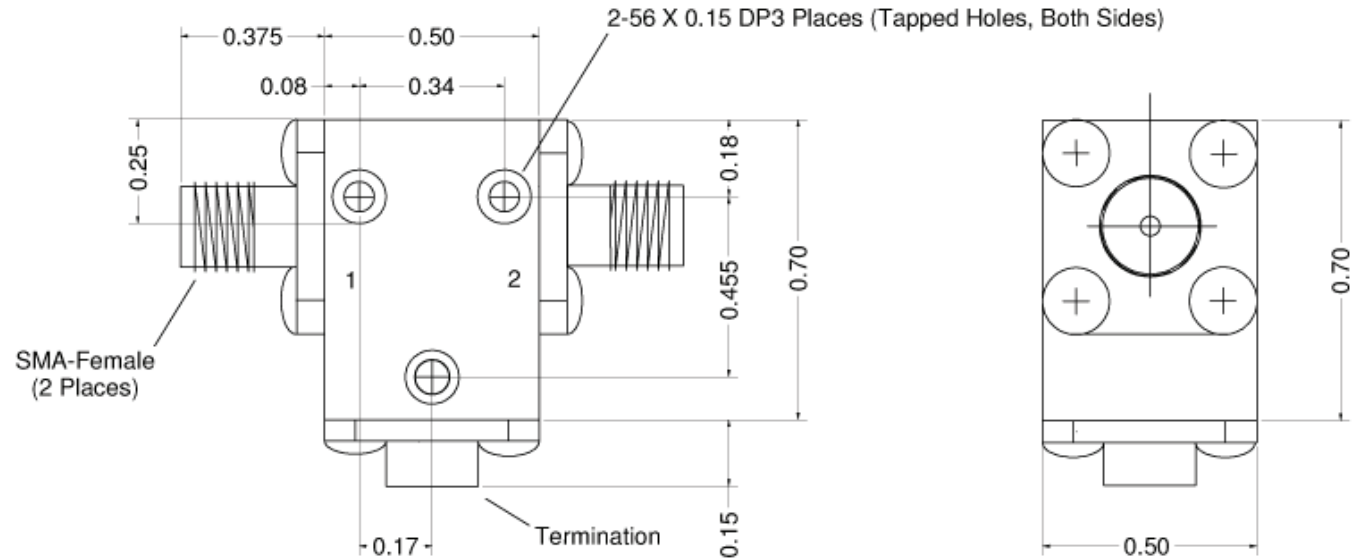
KIS177250

REV.

INITIAL

Electrical Data

Impedance	50Ω
Frequency Range	8.000 - 18.000 GHz
Isolation	17 dB TYP 16 Min.
Insertion Loss	0.70 dB TYP 0.80 Max.
VSWR	1.40 TYP 1.45 Max.
Average Power	5 Watt
Reflective Power	2 Watt
Peak Power	30 Watt
Operating Temp.	-10°C to +85°C
Weight (Approx)	0.9 Ounces

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
540 NW University Blvd. Ste. 109
Port Saint Lucie, Florida, 34986
1-800-790-5887

PART NUMBER

KIS177250

DESCRIPTION

**Isolator - SMA Female Jack Input
SMA Female Jack Output**

CAGE CODE

664U0

SIGNATURE

X

MaterialsSMA Female Connectors Stainless
Contact PinsSteel
Be.CuPassivated
Gold Plated

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.