

PART NUMBER

**KIS177257**

REV.

DATE

COMMENTS

INITIAL


**RoHS Compliant****Electrical Data**

Impedance	50 $\Omega$
Frequency Range	2.300-2.700 GHz.
Isolation	18 dB min
Insertion Loss	0.50 dB
VSWR	1.30

**Mechanical Data**

Operating Temperature: -20 °C - 55 °C

NOTE : Forward Power : 10 W  
Reverse Power : 1 W

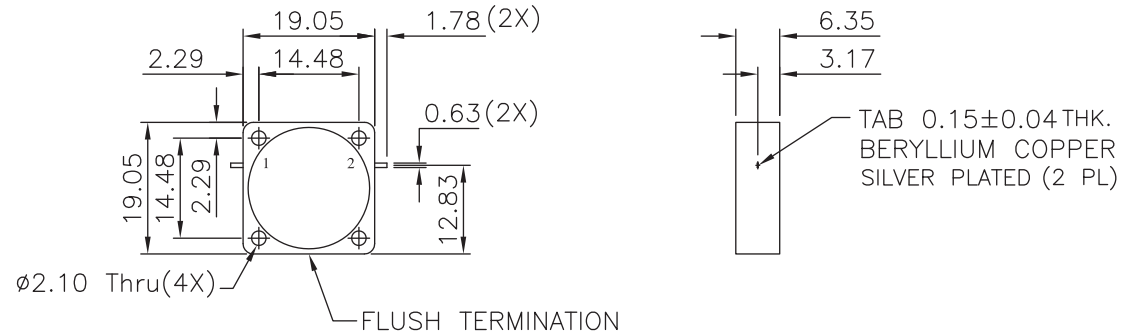

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KIS177257**

DESCRIPTION

**Isolator, Drop In**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Nickel

**Plating**  
Free cutting Steel

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.