

PART NUMBER

KIS177268

REV.

DATE

COMMENTS

INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range 29-31 GHz.
 Insertion Loss 1.0 dB
 Isolation 20 dB
 VSWR 1.25 Max

RoHS Compliant




Mechanical Data

Temperature Range: -20 °C - 65 °C

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	22
Insertion Loss dB (Max.) :	0.90
VSWR (Max.) :	1.20

Forward Power : 5 W
 Reverse Power : 2 W

2-56UNC X 3.50 mm.(Min)
 (2 PLACES)

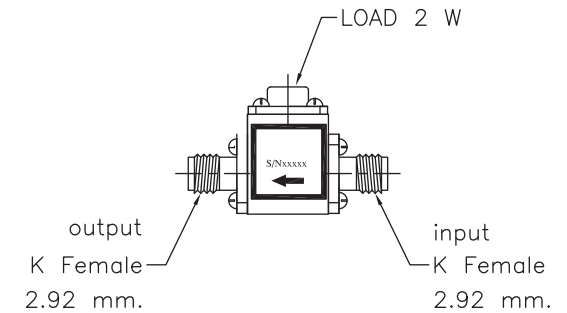

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177268

DESCRIPTION

Isolator, 2.92 Female Jack Input, SMA Female Jack Output

CAGE CODE

664U0

SIGNATURE

X

Component
 Body

Material
 Aluminum

Plating
 Nickel

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.