

PART NUMBER

KIS177284

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	2.0 - 2.7 GHz.
Isolation	23 dB
Insertion Loss	0.35 dB
Input Power	1 Watt
VSWR	1.15 Max

RoHS Compliant**Mechanical Data**

Temperature Range: 0 °C - 55 °C

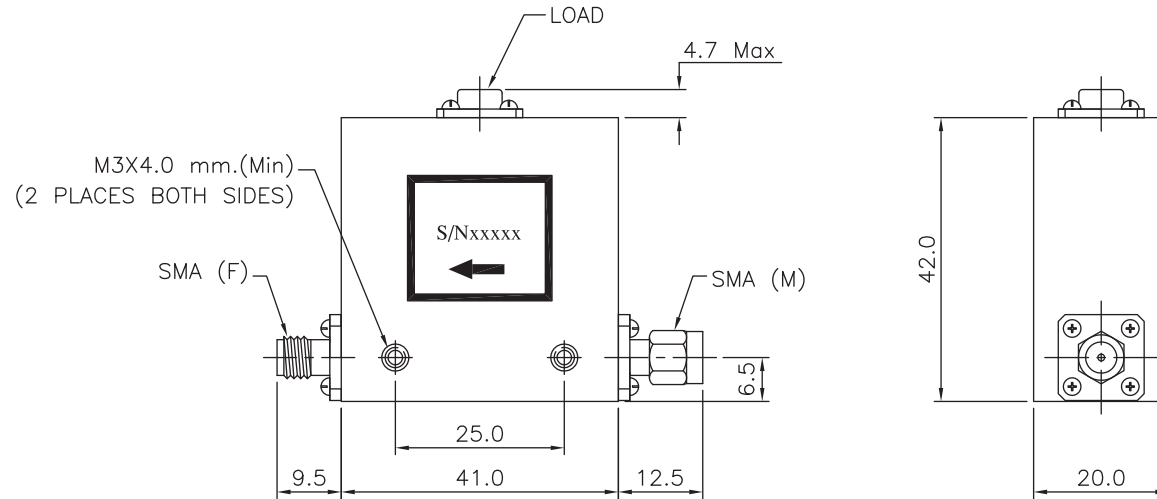

Room Temp :	+25±5°C
Isolation dB (Min.) :	26
Insertion Loss dB (Max.) :	0.30
VSWR (Max.) :	1.10

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177284

DESCRIPTION

Isolator, SMA Male Plug/Female Jack

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.