

PART NUMBER



**KIS177285**

REV.

INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	10 - 12 GHz
Isolation	20 dB Min.
Insertion Loss	0.5 Max.
VSWR	1.25 Max.
Average Power	20 Watt

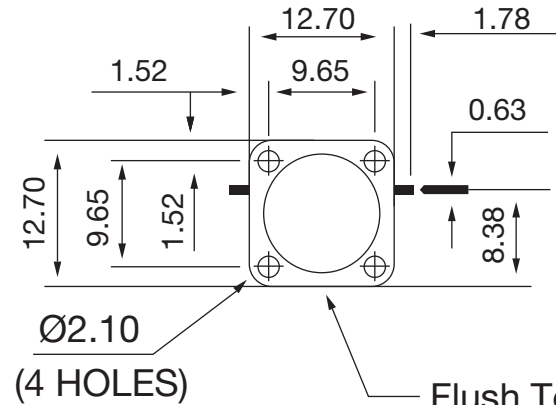

TAB  $0.13 \pm 0.04$  THK.  
Beryllium Copper  
Gold Plated (2 PL)

VSWR and Frequency Range Specifications  
are for reference and are dependant on cable  
type and other application specific conditions

Drawing not to scale. Dimensions for reference only

# Konnect RF

WWW.KONNECTRF.COM  
540 NW University Blvd. Ste. 109  
Port Saint Lucie, Florida, 34986  
1-800-790-5887

PART NUMBER

**KIS177285**

DESCRIPTION

**Isolator - Drop In -10-12 GHz**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.