

PART NUMBER

KIS177293

REV.

DATE

COMMENTS

INITIAL



Electrical Data

Impedance	50 Ω
Frequency Range	10 - 12 GHz.
Insertion Loss	0.35 dB
Isolation Loss	23 dB
VSWR	1.15

RoHS Compliant

Mechanical Data

Operating Temperature Range: 54 °C - 85 °C

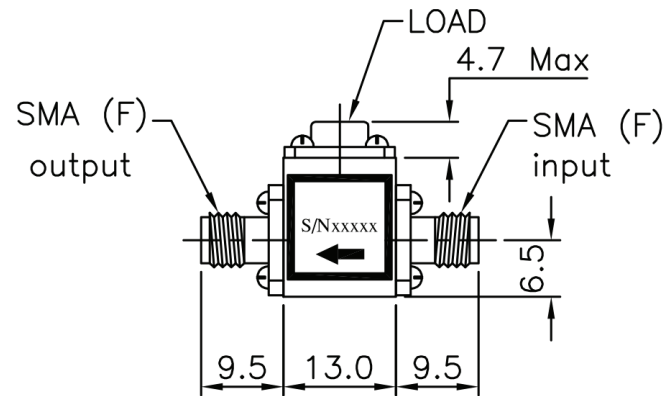

Room Temp :	+25±5°C
Isolation dB (Min.):	26
Insertion Loss dB (Max.):	0.32
VSWR (Max.):	1.10

Drawing not to scale. Dimensions for reference only**Units: mm****Konnect RF**

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177293

DESCRIPTION

Isolator, SMA Female Input, SMA Female Output

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.