

PART NUMBER

**KIS177311**

REV.

DATE

COMMENTS

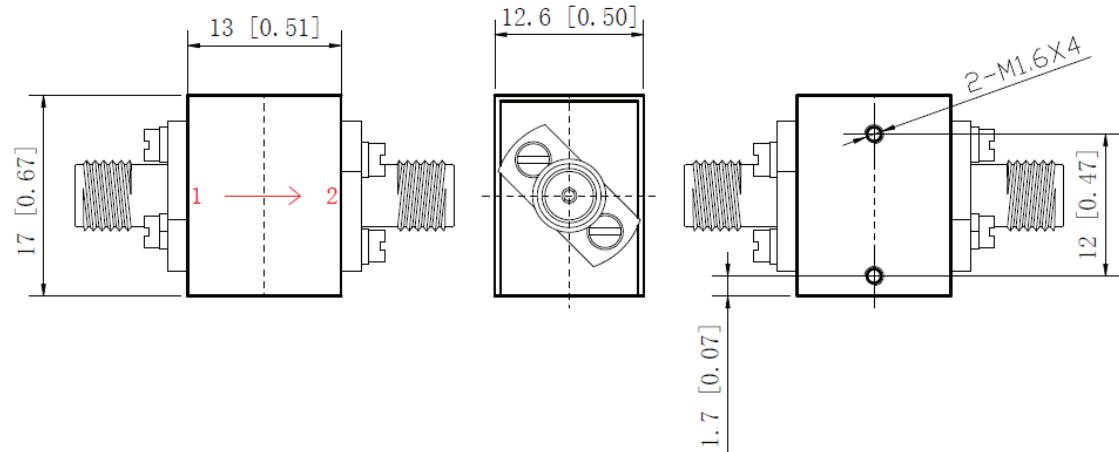
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	26.5 - 40 GHz.
Insertion Loss	1.60 dB Room Temp 25°C
	1.70 dB Over Temp -20°C - 70°C
Isolation	14 dB Room Temp 25°C
	12 dB Over Temp -20°C- 70°C
Power	Forward 10 W
	Reverse 1 W
VSWR	1.60 Room Temp 25°C
	1.80 Over Temp -20- 70°C

**Mechanical Data**

Temperature Range: -20 °C - 70 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KIS177311**

DESCRIPTION

**Isolator, 2.92 Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Copper

**Plating**  
Nickel

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.