

PART NUMBER

KIS177334

REV.

DATE

COMMENTS

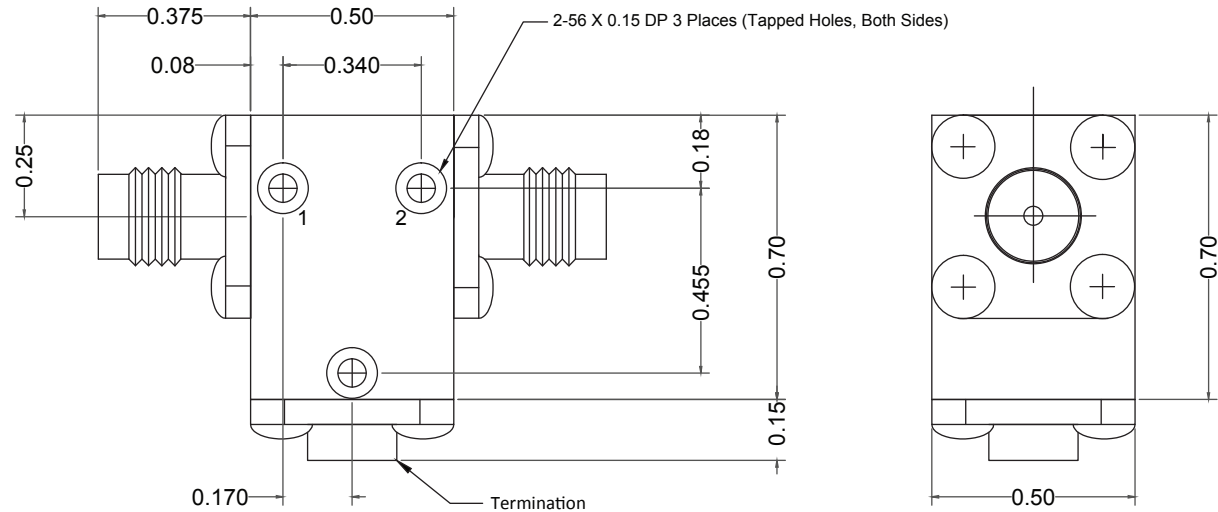
INITIAL

Electrical Data

Frequency Range 17.2 - 31.5 GHz
 Isolation 9 dB Min.
 Insertion Loss ≤ 1.50 dB Max.
 Power:
 AVG (Port 1 to 2) 10 W
 Reflective Power (Term) 2 W
 Peak 30 W
 VSWR ≤ 2.10 Max

Mechanical Data

Weight 0.70 Ounces (20 Grams)
 Temperature Range: -20 °C - 65 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177334

DESCRIPTION

Isolator, 2.92mm Female Input, 2.92 Female Output

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Contact Pins

Material

Stainless Steel
 BeCu

Plating/Finish

Passivated
 Gold