

PART NUMBER

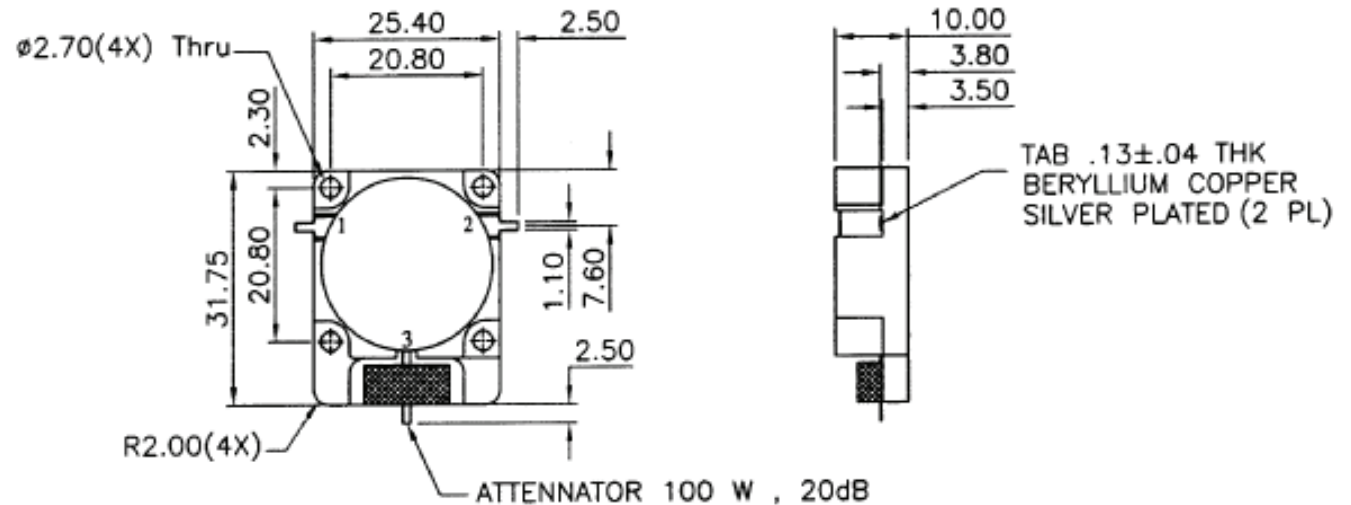
KIS177335

REV.

INITIAL

Electrical Data

Frequency Range	1.5 - 1.7 GHz
Isolation	20 dB Min.
Insertion Loss	0.35 dB Max.
VSWR	1.25 Max.
Forward Power	150 Watts
Reverse Power	100 Watts
Temperature Range	-20° To + 85°C

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KIS177335DESCRIPTION **Isolator - Drop In**

CAGE CODE

664U0

SIGNATURE

X

Materials

Body

Be.Cu

Nickel Plated

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.