

PART NUMBER

KIS177341

REV.

DATE

COMMENTS

INITIAL

Electrical Data


Impedance 50 Ω
 Frequency Range 1.35 - 2.7 GHz.
 Insertion Loss 0.60 dB Max. From 1.35-2.7 GHz @ 25°C
 0.70 dB Max. From 1.41-2.7 GHz @ -40°C to -30°C
 0.80 dB Max. From 1.35-1.41 GHz @ -40°C to -30°C

Power Handling 50 W
 Termination Power 20 W
 Isolation 15 dB Min. @ -40°C to -30°C
 17 dB Min. @ -30°C to 85°C

VSWR $\leq 1.35:1$ @ -40°C to 85 °C

RoHS Compliant**Mechanical Data**

Temperature Range: -40°C to 85 °C

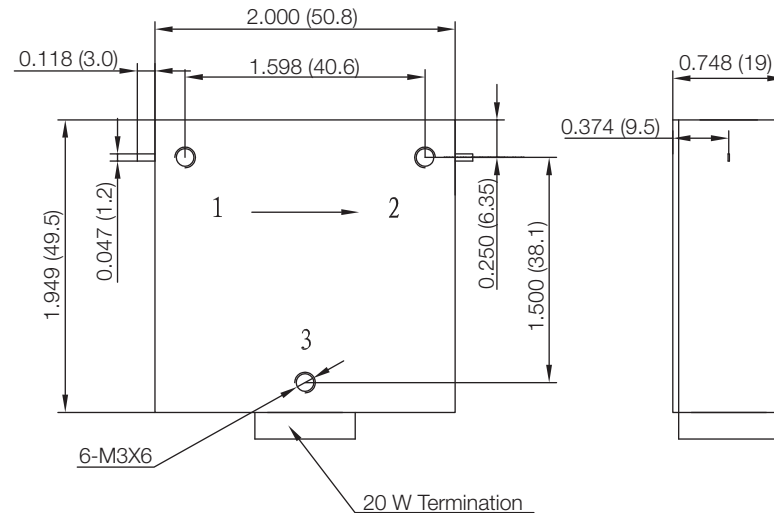

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177341

DESCRIPTION

Isolator, Drop In

CAGE CODE

664U0

SIGNATURE

X

ComponentBody
Tabs**Material**Aluminum
Brass**Plating**Nickel
Silver

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.