

PART NUMBER


KIS177345

REV.

INITIAL

Electrical Data**RoHS Compliant**

Frequency Range 14.00 - 14.50 GHz
 Isolation 20 dB Min.
 Insertion Loss 0.50 dB Max.
 VSWR 1.25 Max.
 Average Power 5 Watt
 Operating Temperature -40° to + 80°C

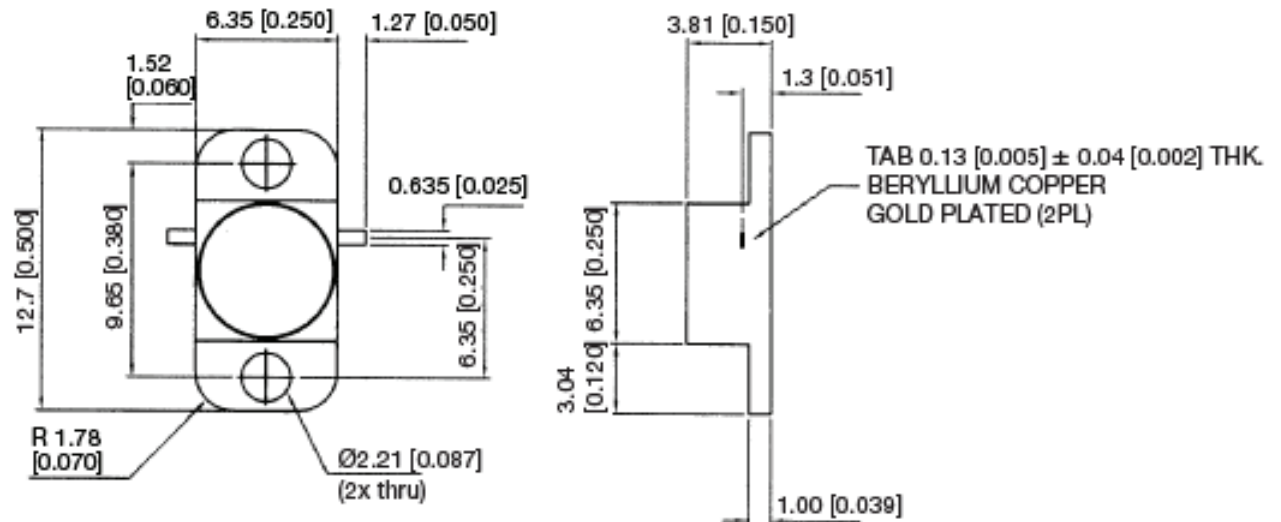

VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KIS177345

DESCRIPTION

**Isolator - Drop In
Flange Mount**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.