

PART NUMBER

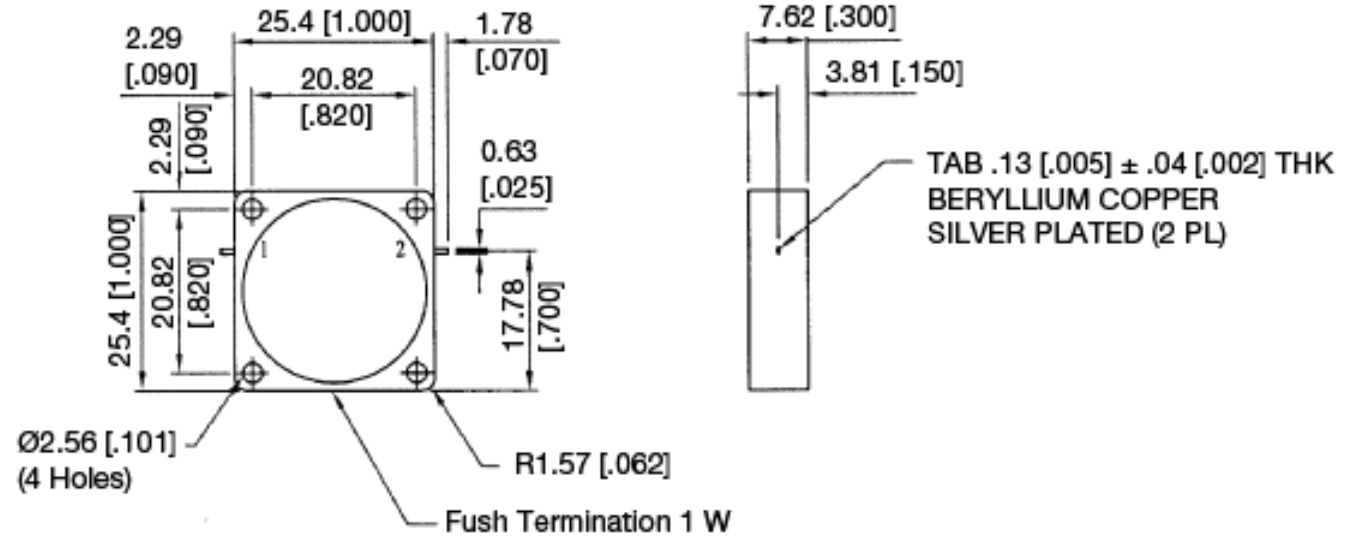
KIS177351

REV.

INITIAL

Electrical Data

Frequency Range	1.1 - 1.4 GHz
VSWR	1.33 Max.
Insertion Loss	0.60 dB Max.
Isolation	18 dB Min.
Average Power	1 Watt
Operating Temperature	-30° to + 70°C

RoHS Compliant

VSWR and Frequency Range Specifications
are for reference and are dependant on cable
type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
540 NW University Blvd. Ste. 109
Port Saint Lucie, Florida, 34986
1-800-790-5887

PART NUMBER

KIS177351

DESCRIPTION

Isolator - Drop In

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.