

PART NUMBER

**KIS177362**

REV.

DATE

COMMENTS

INITIAL

**Electrical Data**

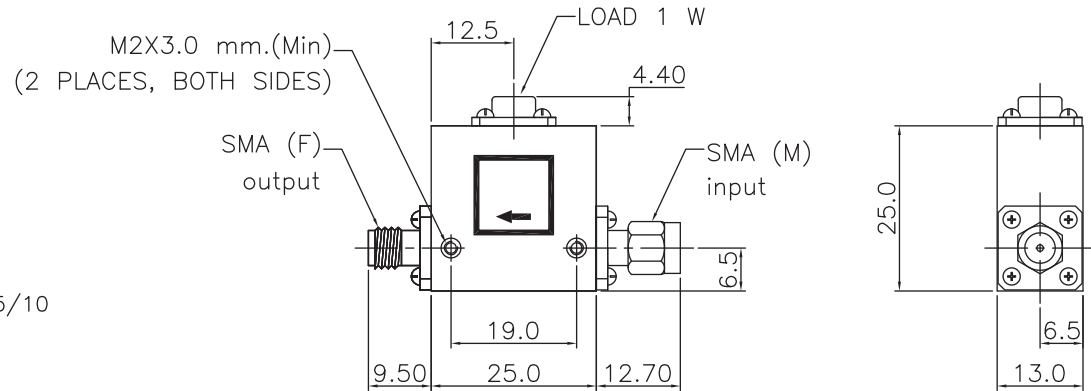
Impedance	50 $\Omega$
Frequency Range	2.496 - 2.690MHz.
Isolation	23dB min
Insertion Loss	0.40dB Max
VSWR	1.15 Max

**Mechanical Data**

Temperature Range: -15 °C - 45 °C

Spec: Forward Power : 25 W CW  
Reverse Power : 1 W CW

Note: Date Code Example : Week 25 in 2010 We Would Read 25/10

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KIS177362**

DESCRIPTION

**Isolator, SMA Male Plug Input, SMA Female Jack Output**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body**Material**  
Aluminum**Plating**  
Black paintTHIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.