

PART NUMBER

**KIS177363**

REV.

DATE

COMMENTS

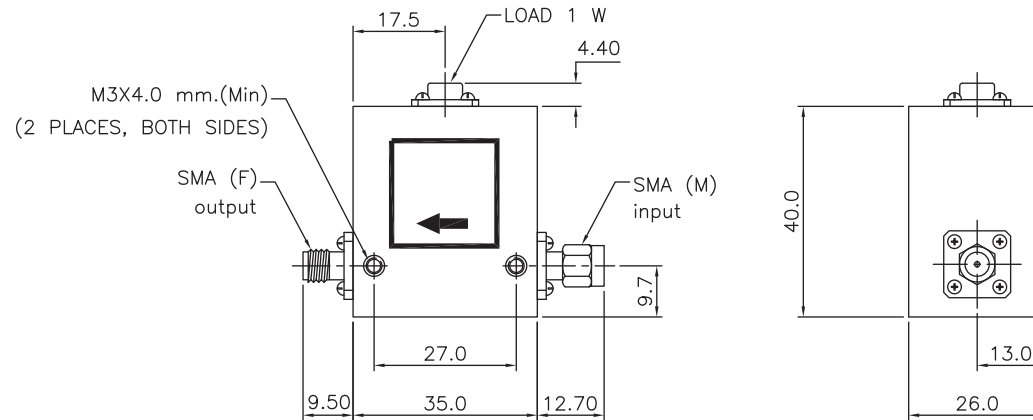
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	718 - 803 MHz.
Isolation	23dB Min
Insertion Loss	0.50 dB Max
VSWR	1.15 Max

**Mechanical Data**

Temperature Range: -15 °C - 45 °C

**RoHS Compliant**

Spec: Forward Power : 50 W CW

Reverse Power : 1 W CW

Note: Date Code Example : Week 25 in 2010 We Would Read 25/10

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM

1-800-790-5887

PART NUMBER

**KIS177363**

DESCRIPTION

**Isolator, SMA Male Plug Input, SMA Female Jack Output**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Aluminum

**Plating**  
Black Paint

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.