

PART NUMBER

**KIS177378**

REV.

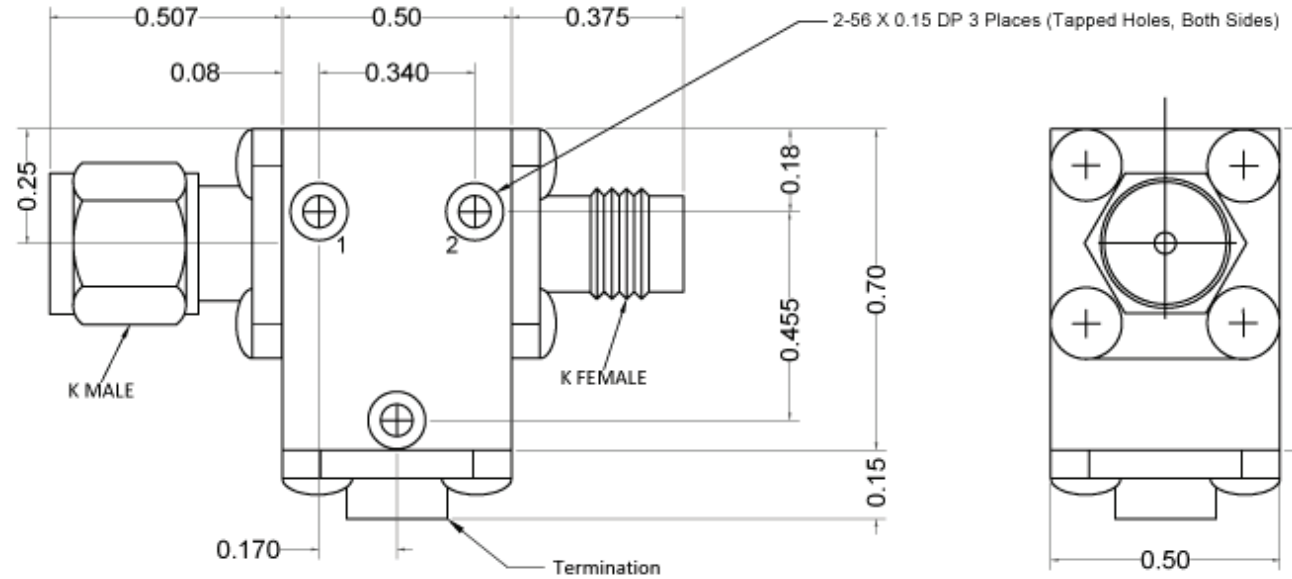
INITIAL

**Electrical Data**

Frequency Range 26.5 - 31.0 GHz  
 Isolation 18 dB Min.  
 Insertion Loss 0.60 dB Max.  
 VSWR 1.30 Max.

Power  
 Average (Port 1 to 2) 5 Watt  
 Reflective Power (Term) 2 Watt  
 Peak 30 Watt

Operating Temperature -20° to +65°C  
 Weight (Approx) 0.40 Ounces

**RoHS Compliant**

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM  
 540 NW University Blvd. Ste. 109  
 Port Saint Lucie, Florida, 34986  
 1-800-790-5887

PART NUMBER

**KIS177378**

DESCRIPTION

**Isolator - K Male Input  
K Female Output**

CAGE CODE

**664U0**

SIGNATURE

X

**Materials**K-Male/Female Connectors  
Contact PinsStainless Steel  
Be.CuPassivated  
Gold Plated

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.