

PART NUMBER

KIS177379

REV.

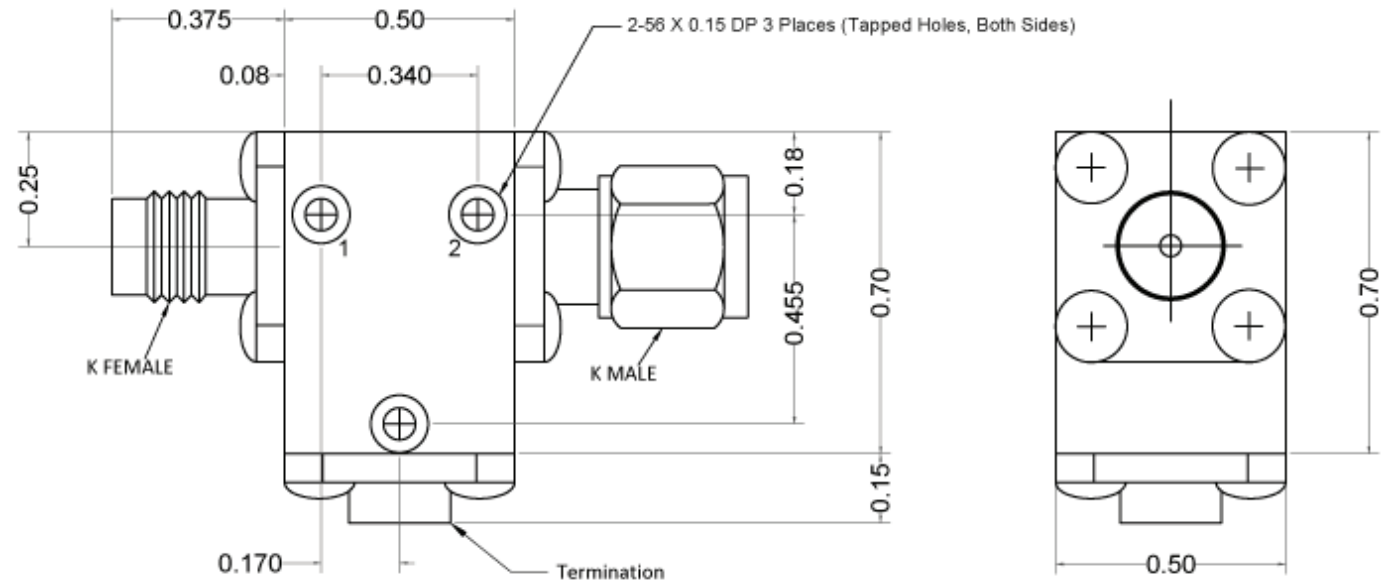
INITIAL

Electrical Data

Frequency Range 26.5 - 31.0 GHz
 Isolation 18 dB Min.
 Insertion Loss 0.60 dB Max.
 VSWR 1.30 Max.

Power
 Average (Port 1 to 2) 5 Watt
 Reflective Power (Term) 2 Watt
 Peak 30 Watt

Operating Temperature -10° to + 85°C
 Weight (Approx) 0.40 Ounces

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KIS177379

DESCRIPTION

**Isolator - K Female Input
K Male Output**

CAGE CODE

664U0

SIGNATURE

X

MaterialsK-Male/Female Connectors
Contact PinsStainless Steel
Be.CuPassivated
Gold Plated

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.