

PART NUMBER

KIS177380

REV.


INITIAL

Electrical Data

Frequency Range	18 - 29 GHz.
Insertion Loss	≤ 1.70 dB max.
Isolation	12 min.
VSWR	≤ 2.0
Power	
Average (Port 1 to 2)	5W
Reflective Power (Term)	2W
Peak	30W

RoHS Compliant**Mechanical Data**

Weight (Approx)	0.90 Ounces
Temperature Range:	-40 °C - 70 °C

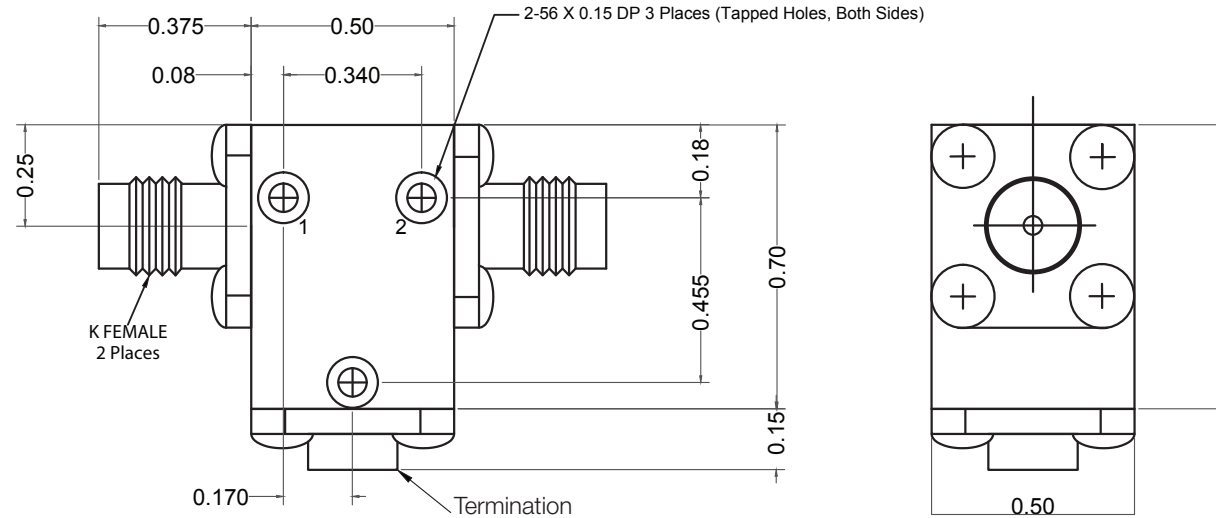

Drawing not to scale. Dimensions for reference only

Units: Inches

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177380

DESCRIPTION

Isolator, 2.92mm Female Input, 2.92 Female Output

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Body
Center Contact

Material

Stainless Steel
BeCu

Plating

Passivated
Gold