

PART NUMBER

KIS177382

REV.


INITIAL

Electrical Data

Frequency Range	29 - 40 GHz.
Insertion Loss	≤ 1.00 dB max.
Isolation	14 dB min.
VSWR	≤ 1.50
Power	
Average (Port 1 to 2)	5W
Reflective Power (Term)	2W
Peak	30W

RoHS Compliant**Mechanical Data**

Weight (Approx)	0.90 Ounces
Temperature Range:	-40 °C - 70 °C

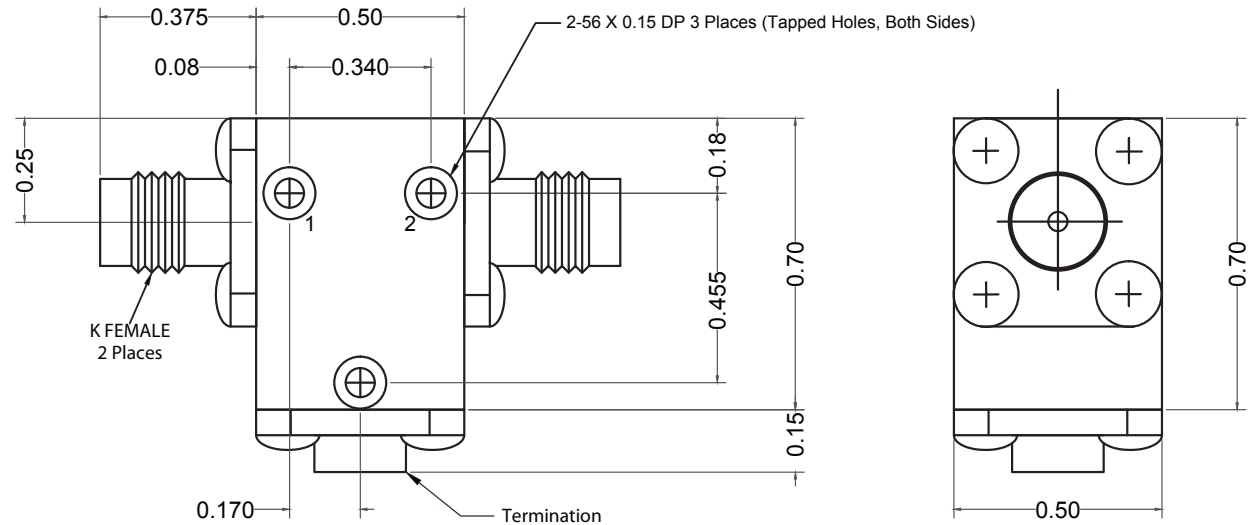

Drawing not to scale. Dimensions for reference only

Units: Inches

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177382

DESCRIPTION

Isolator, 2.92mm Female Input, 2.92mm Female Output

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Component

Body
Center Contact

Material

Stainless Steel
BeCu

Plating

Passivated
Gold