PART NUMBER	REV.			INITIAL
KIS177388				

Electrical Data

RoHS Compliant

Impedance	50 Ω
Frequency Range	6-18 GHz
Isolation (dB)	15 Typ. 14 Min.
Insertion Loss (dB)	0.90 Typ. 1.00 Max.
VSWR	1.45 Typ. 1.50 Max.
Power:	
Avg. (Port 1-2)	5W
Reflective Power (Term)	2W
Peak	20W

Mechanical Data

Operating Temperature	0 to +85°C

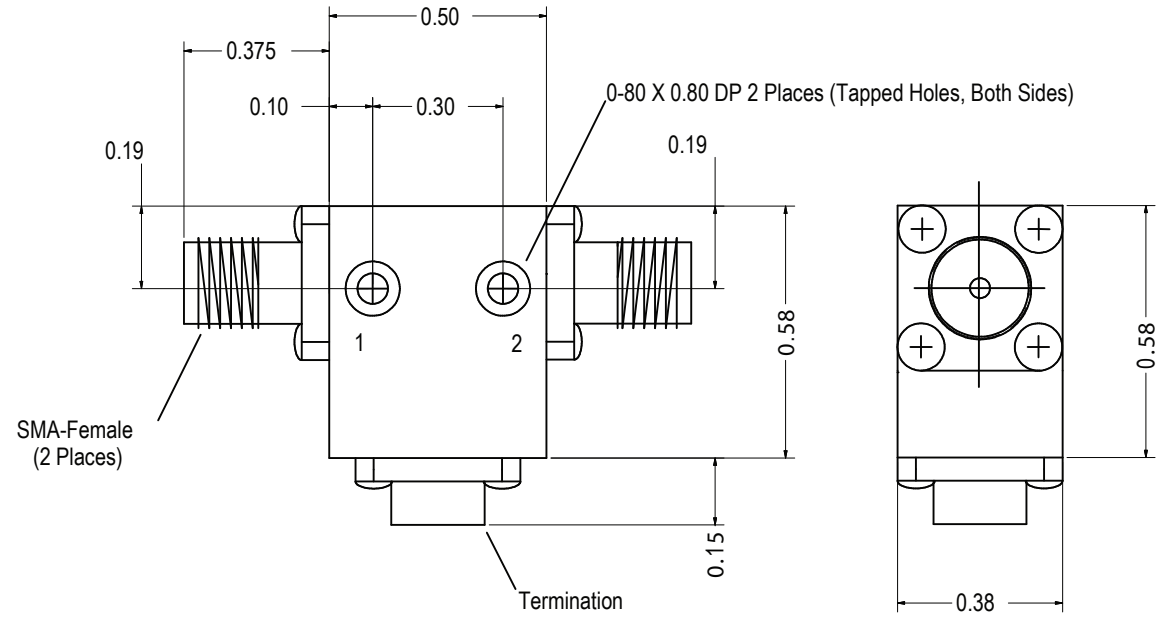

Drawing not to scale. Dimensions for reference only **Units: inches**

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER	DESCRIPTION
KIS177388	**Isolator, SMA Female Input, SMA Female Output**
CAGE CODE **664U0**	SIGNATURE X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Component	Material	Plating
Connectors	Stainless Steel	Passivated
Center Contact	Be.Cu	Gold