

PART NUMBER

**KIS177392**

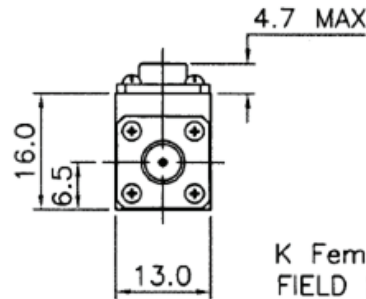


REV.

INITIAL

**Electrical Data****RoHS Compliant**

Frequency Range	18.00 - 29.00 GHz
Isolation	12 dB Min.
Insertion Loss	2.00 dB Max.
VSWR	2.00 Max.
Average Power	2 Watt
Operating Temperature	-40° to + 70°C

2-56UNC X 3.50 mm. LOAD 2 W

K Female 2.92 mm.  
FIELD REPLACEABLEK Female 2.92 mm.  
FIELD REPLACEABLE

Drawing not to scale. Dimensions for reference only

**Konnnect RF**

WWW.KONNECTRF.COM  
540 NW University Blvd. Ste. 109  
Port Saint Lucie, Florida, 34986  
1-800-790-5887

PART NUMBER

**KIS177392**

DESCRIPTION

**Isolator - 2.92mm Female Input (Field Replaceable)  
2.92mm Female Output (Field Replaceable)**

CAGE CODE

**664U0**

SIGNATURE

X

**Materials**

Body

Nickel Plated

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.