

PART NUMBER




KIS177393

REV.

INITIAL

Electrical Data**RoHS Compliant**

Frequency Range	29.00 - 40.00 GHz
Isolation	12 dB Min.
Insertion Loss	2.00 dB Max.
VSWR	2.00 Max.
Average Power	2 Watt
Operating Temperature	-40° to + 70°C

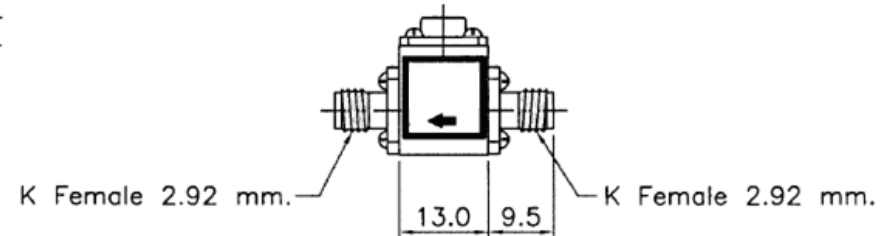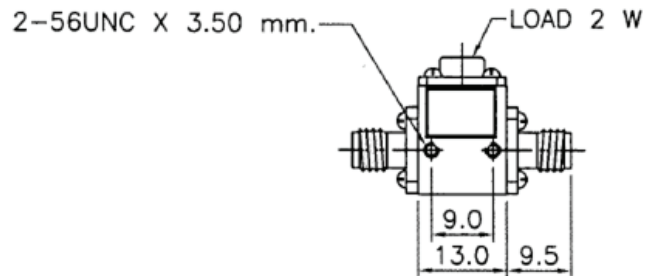

Drawing not to scale. Dimensions for reference only

Konnnect RF

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KIS177393

DESCRIPTION

**Isolator - 2.92mm Female Input
2.92mm Female Output**

CAGE CODE

664U0

SIGNATURE

X

Materials

Body

Nickel Plated

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.