

PART NUMBER

KIS177603

REV.

DATE

COMMENTS

INITIAL

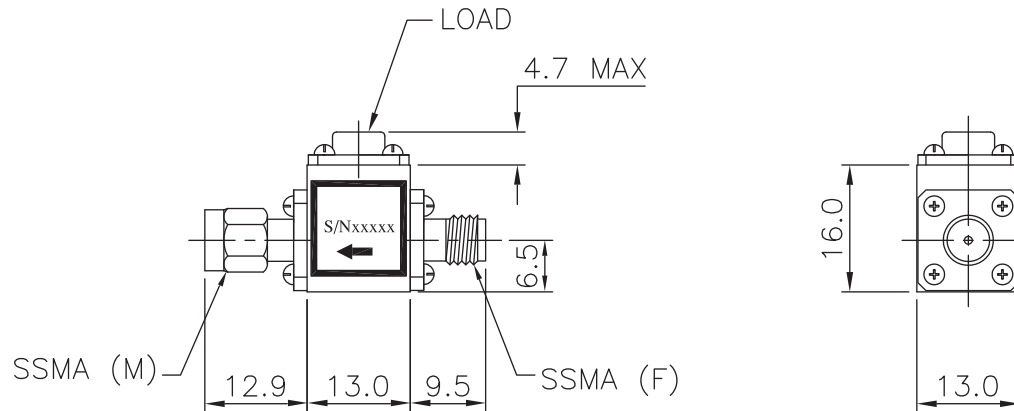
Electrical Data

Frequency Range 24 - 26.2 GHz.
 Isolation 20 dB
 Insertion Loss 0.70 dB max
 Average Power 1 Watt
 VSWR 1.25

Mechanical Data

Temperature Range: -55 °C - 85 °C

**Note : Room Temp +25+/-5°C 23/0.65/1.18
 Direction : Clockwise

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177603

DESCRIPTION

Isolator, SSMA Female Jack/SSMA Male Plug

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.