

PART NUMBER

KIS177604

REV.

DATE

COMMENTS

INITIAL

RoHS Compliant**Electrical Data**

Frequency Range 1.350-1.850 Ghz
 Isolation 18 dB min
 Insertion Loss 0.50
 VSWR 1.30 Max


Mechanical Data

Operating Temperature : -20°C - 65 °C

Room Temp :	+25±5°C
Isolation dB (Min.) :	20
Insertion Loss dB (Max.) :	0.45
VSWR (Max.) :	1.25

Forward Power : 50 W CW
 Reverse Power : 10 W CW

Thermal vacuum spec. 10-6 Mbar and states designing this unit with low outgassing materials for TVAC environment

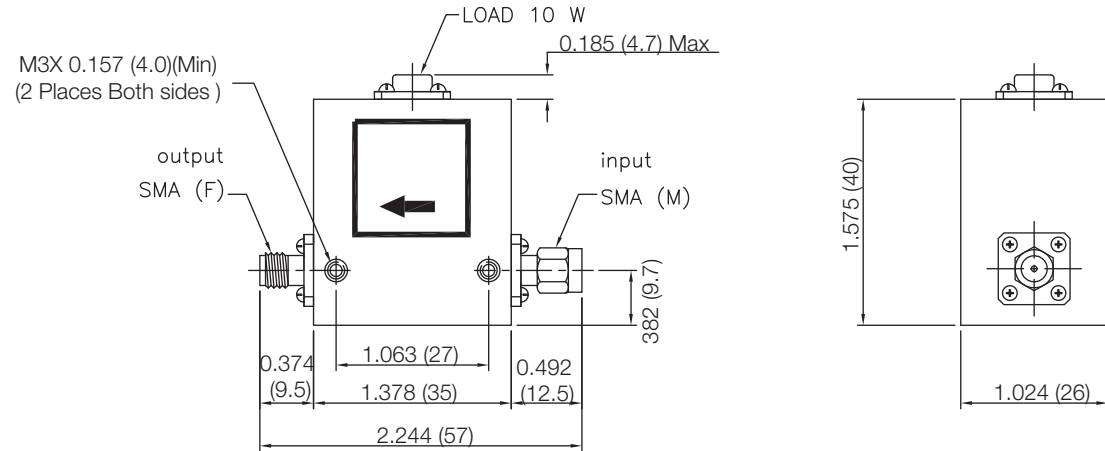

Drawing not to scale. Dimensions for reference only

Units: Inches (mm)

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS177604

DESCRIPTION

Isolator, SMA Male Plug Input/SMA Female Jack Output, TVAC

CAGE CODE

664U0

SIGNATURE

X

Component
 Body

Material
 Aluminum

Plating
 Nickel

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.