

PART NUMBER

KIS177605

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Frequency Range	24 - 26.2 GHz.
Isolation	20 dB
Insertion Loss	0.70 dB max
Average Power	1 Watt
VSWR	1.25

RoHS Compliant**Mechanical Data**

Temperature Range: -54 °C - 85 °C

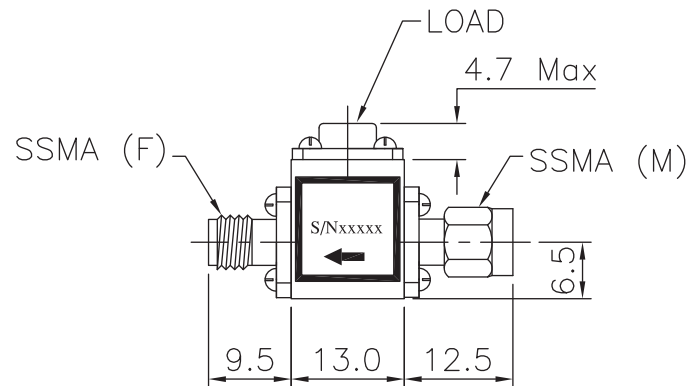

Room Temp :	+25±5°C
Isolation dB (Min.) :	23
Insertion Loss dB (Max.) :	0.65
VSWR (Max.) :	1.18

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177605

DESCRIPTION

Isolator, SSMA Male Plug/SSMA Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.