

PART NUMBER

KIS177745

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	13.00-14.50GHz
Isolation	23dB Min
Insertion Loss	0.40dB Max
VSWR	1.15max
Average Power	1Watt

RoHS Compliant**Mechanical Data**

Operating Temperature: -54 °C - 85 °C

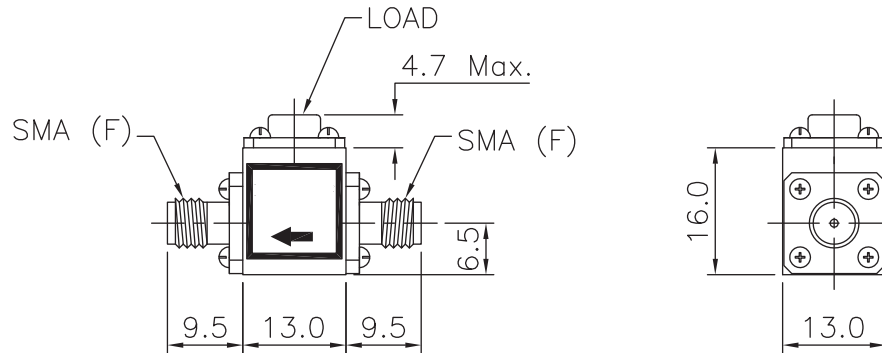

Note: Direction :Clockwise

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177745

DESCRIPTION

Isolator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Plating/Finish
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.