

PART NUMBER

KIS177888

REV.

DATE

COMMENTS

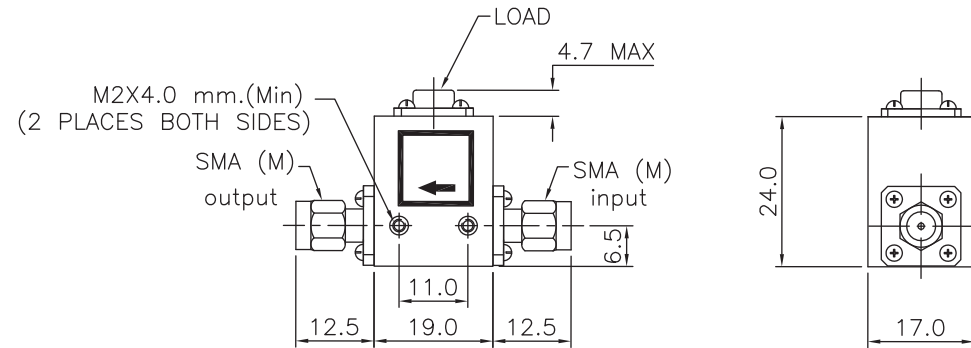
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	7.00-11.00GHz.
Isolation	20dB Min
Insertion Loss	0.40dB Max
Average Power	1 Watt
VSWR	1.25 Max

Mechanical Data

Operating Temperature : -54 °C - 85 °C

RoHS Compliant

Spec:

Room Temp :	+25 \pm 5°C
Isolation dB (Min.) :	24
Insertion Loss dB (Max.) :	0.37
VSWR (Max.) :	1.15

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KIS177888

DESCRIPTION

**Isolator, SMA Male Input, SMA Male Output,
7-11 GHz, 20 dB Isolation**

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Aluminum

Plating/Finish
Black Paint

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.