

PART NUMBER

KIS178664

REV.

DATE

COMMENTS

INITIAL

Electrical Data




Impedance 50Ω
 Isolation 20dB min
 Frequency Range 25.50-27.00 GHz.
 Insertion Loss 1.00 dB Max
 Average Power 1 Watt
 VSWR 1.30

RoHS Compliant**Mechanical Data**

Operating Temperature Range: -10 °C - 60 °C

NOTE : Room Temp +25±5°C AT Spec: 22/0.90/1.19
 Direction : Clockwise

2-56UNC X 3.50 mm.

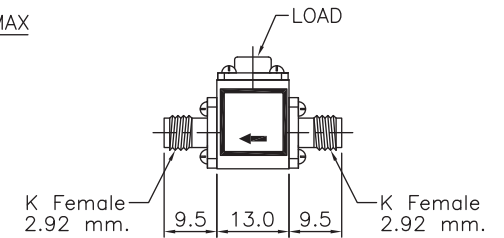

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KIS178664

DESCRIPTION

Isolator, 2.92mm Female Jack to 2.92mm Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component
 Body

Material
 Aluminum

Plating
 Nickel