

PART NUMBER

KLP177101

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 6 GHz.
Insertion Loss	0.4 dB
Return Loss	20 dB
Breakdown Voltage	230V +/- 20%V
Impulse Discharge Current	5kA
Max Impulse Discharge Current	10kA
Max Power	15W
DC Pass/Block	Pass
Salt Fog	72h

RoHS Compliant**Mechanical Data**

Temperature Range:	-45 °C - 85 °C
IP67	

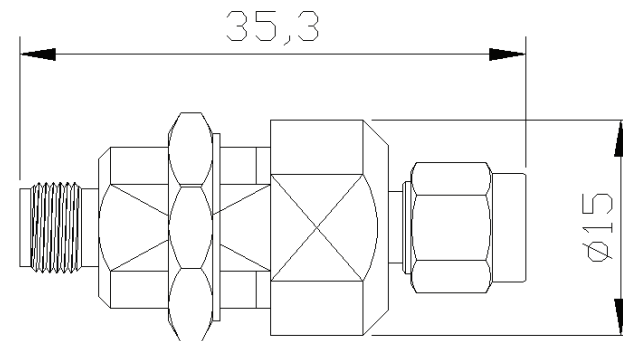

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KLP177101

DESCRIPTION

Lightning Protector, Gas Discharge Tube, SMA Male Plug to SMA Female Jack, Bulkhead

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.