

Weight: 0.7 ounces typ / 20g typ


RF Specifications

- Nominal Impedance: 50 ohm
- RF Power: 100 W Maximum
- Through Current: 65 Vdc / 5A Maximum

Transient Specifications

- Protection Voltage: 200V
- Maximum Transient: 20 kA (8x20µs)
- Multiple Strike: 5kA 10 times
- Let-through: 475 V_{peak}/300µJ
(Input 4kV 1.2x50µs / 2kA 8x20µs)

Frequency (GHz)	VSWR (Average)	Insertion Loss, dB (typ)
Dc – 2.5	1.2	0.1
2.5 – 11.0	1.5	0.3

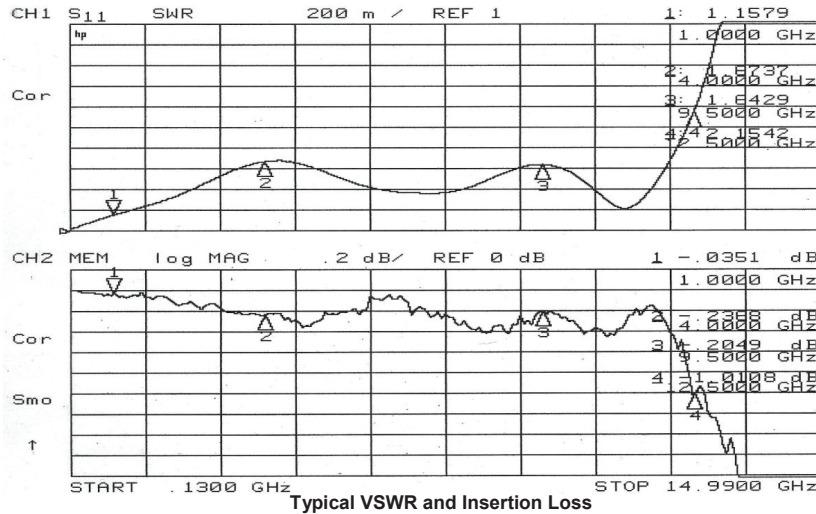

Environmental Specifications

Temperature Range	-40°C to +90°C
Salt Fog	MIL-STD-202 Method 101D / Condition B (35°C/96 hrs)
Immersion	MIL-STD-202 Method 104A / Condition A (65°C to 25°C w/NaCl – 2 cycles)
Moisture Resistance	MIL-STD-202 Method 106E (65°C/98% RH condensing/240 hrs)
Temperature Shock	MIL-STD-202 Method 107D / Condition B-1 (25 cycles -65°C to +125°C)
Life (Elevated Temperature)	MIL-STD-202 Method 108A / Condition A (96 hours at 100°C)
Dust and Waterproof Rating	IEC529 IP68 (dust-tight and water proof 24 hrs / 1 m)
Vibration	MIL-STD-202 Method 204D / Condition D (10Hz-2kHz 0.06"DA/20g)
Mechanical Shock	MIL-STD-202 Method 213 / Condition A (50g/11ms ~24")

Material and Finish

Component	Material	Finish
Outer Parts	Brass	Nickel
Inner and Outer Contact	BeCu	Gold
SMA Connector	Brass	Gold
Insulator	PTFE	-
Gasket	EPDM	-