

PART NUMBER

KPD177002

REV.

DATE

COMMENTS

INITIAL

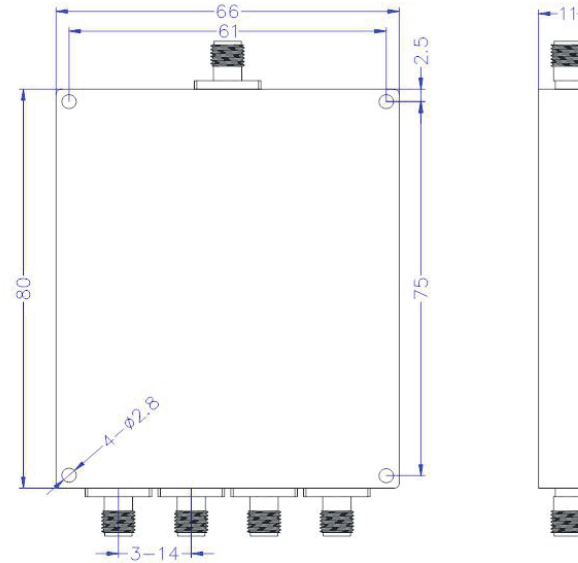
Electrical Data

Impedance	50 Ω
Frequency Range	600-4600 MHz.
Insertion Loss	≤ 1.8 dB
Amplitude Balance	$\leq +/- 0.5$ dB
Phase Balance	$\leq +/- 5$ Degrees
Isolation	≥ 19 dB
Average Power	20W Forward 2W Reverse
VSWR	≤ 1.40 (Input) ≤ 1.30 (Output)

Mechanical Data

Temperature Range:	-40 $^{\circ}$ C - 80 $^{\circ}$ C (Operational)
Temperature Range:	-40 $^{\circ}$ C - 85 $^{\circ}$ C (Storage)

RoHS Compliant

**(± 0.3 mm)**

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177002

DESCRIPTION

Power Divider, 4 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.