


Power Divider, 2 Way, 2.92 Female
Outline Drawing (+0.3mm)

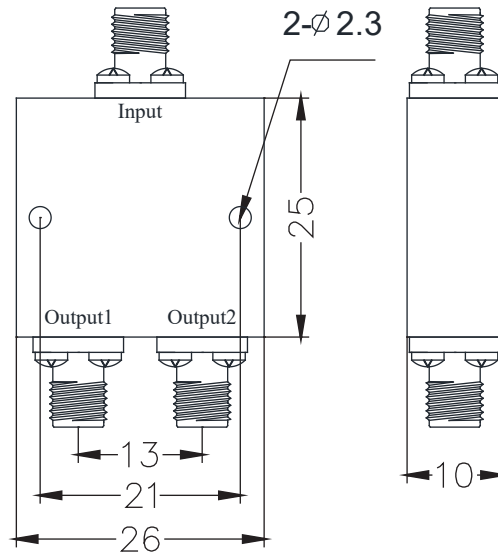

| Parameter | Specification | Remark |
|-------------------|----------------------------------|--------|
| Frequency Range | 26500-40000MHz | |
| Insertion loss | ≤ 1.5dB | |
| VSWR | ≤ 1.80 (Input) ≤ 1.60(Output) | |
| Amplitude Balance | ≤ ±0.40dB | |
| Phase Balance | ≤ ±5degree | |
| Isolation | ≥ 16dB | |
| Average Power | 5W (Forward) | |
| Impedance | 50Ω | |

| Parameter | Specifications | Remark |
|----------------|-----------------------------|--------|
| Dimensions | 26.0x25.0x10.0mm | |
| Connector Type | 2.92-female | |
| Surface Finish | Grey Painting or Customized | |

| Parameter | Specifications | Remark |
|-------------------------|----------------|--------|
| Operational Temperature | -40 to +80 °C | |
| Storage Temperature | -45 to +85 °C | |