

PART NUMBER

KPD177021

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	500 - 3,000 MHz.
Insertion Loss	0.7 dB Max
Isolation	20dB min
Phase Unbalance	$\pm 3^\circ$ max
Amplitude Unbalance	± 0.2 dB max
Power Handling	30W
VSWR Input	1.18 typ./1.23 max
VSWR Output	1.12 typ./1.20 max

RoHS Compliant**Mechanical Data**

Temperature Range: -45 °C - 85 °C

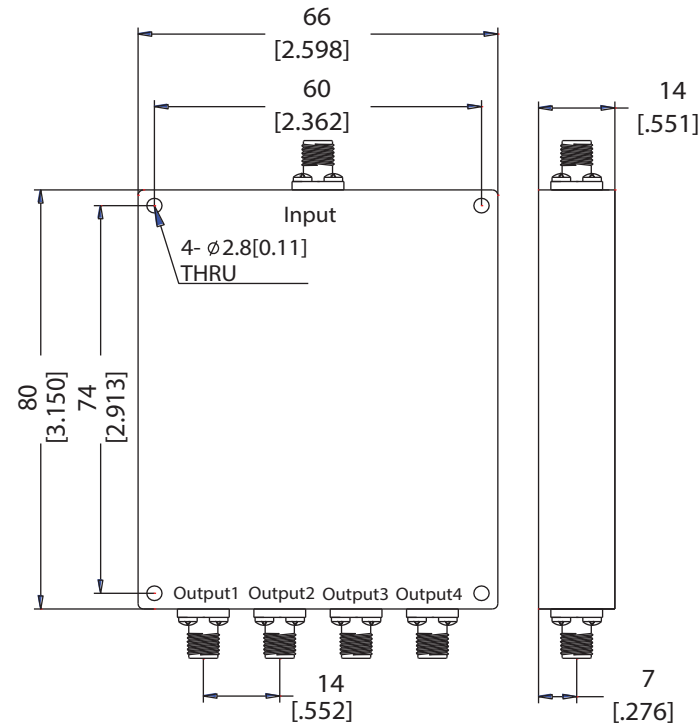

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177021

DESCRIPTION

Power Divider, 4 Way, SMA Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Plating/Finish
Black Plating

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.