

PART NUMBER

**KPD177022**

REV.

DATE

COMMENTS

INITIAL


**Electrical Data**

|                   |               |
|-------------------|---------------|
| Impedance         | 50 $\Omega$   |
| Frequency Range   | 18 - 40 GHz.  |
| Insertion Loss    | $\leq$ 2.2 dB |
| VSWR              | $\leq$ 1.60:1 |
| Isolation         | $\geq$ 18 dB  |
| Amplitude Balance | $\leq$ 0,5    |
| Phase Balance     | $\leq$ 5°     |
| Power Rating as   |               |
| Divider           | 30 Watts      |
| Combiner          | 2 Watts       |

**Mechanical Data**

Temperature Range: -45 °C - 85 °C

RoHS Compliant

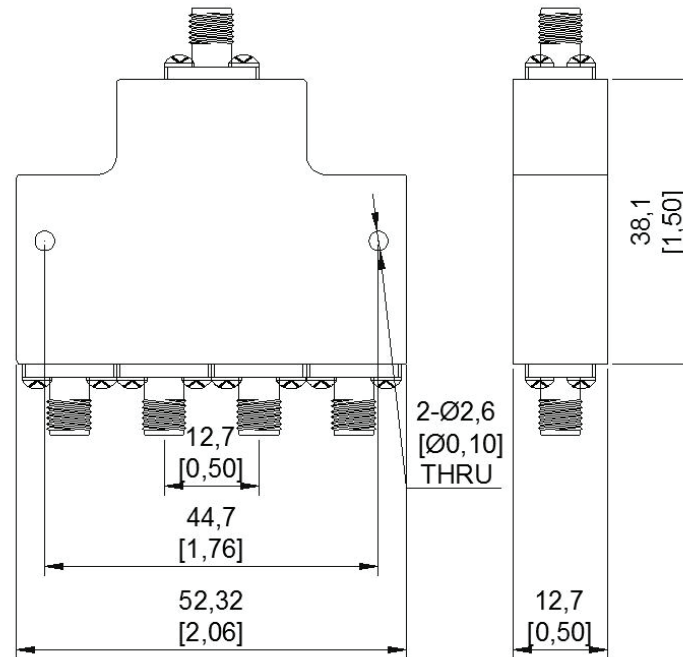

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD177022**

DESCRIPTION

**Power Divider, 4 Way, 2.92 Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body  
Center Contact  
Housing

**Material**  
Brass  
Beryllium Brass  
Aluminum

**Plating**  
Gold or White Bronze  
Gold or Silver

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.