

PART NUMBER

KPD177163

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	26.5 - 40 GHz.
Insertion Loss	2.4 dB
Isolation	18 dB min
Unbalance	
Phase	+/- 5 Deggress
Amp	+/- 0.4 dB
Power Handling	20 Watt max input, 0.5 Output
VSWR	1.6 max

RoHS Compliant**Mechanical Data**

Temperature Range: -55 °C - 105 °C

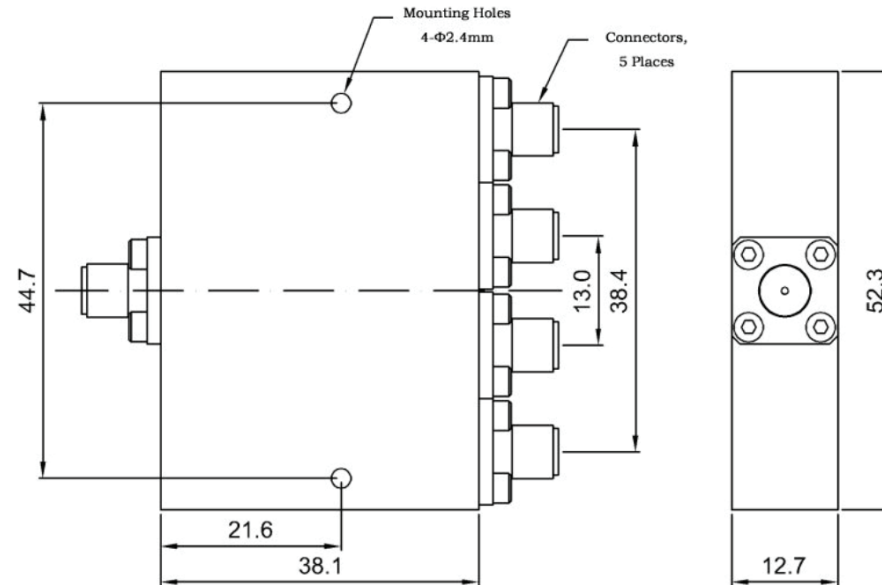

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177163

DESCRIPTION

Power Divider, 4 Way, 2.92mm Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.