

PART NUMBER

**KPD177178**

REV.

DATE

COMMENTS

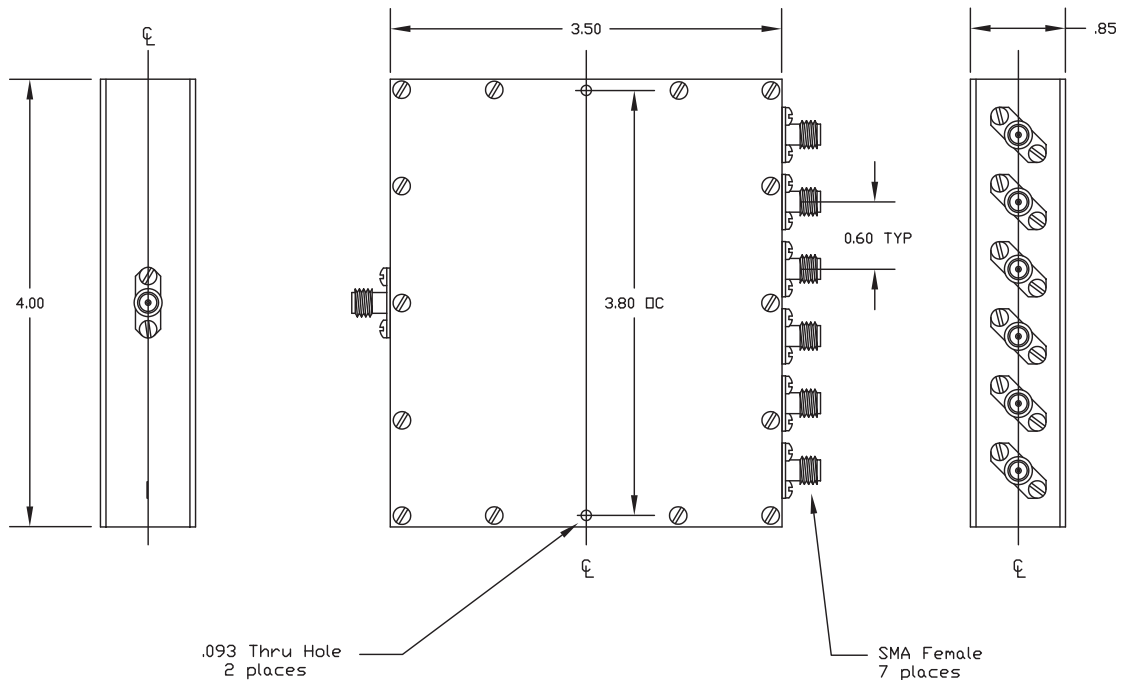
INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC - 6 GHz.
Insertion Loss	+/- 1.0 dB (DC-4 GHz) +/- 1.6 dB (5-6 GHz)
Amplitude Tracking	+/- 0.5 dB Max.
Input Power	1 Watt
VSWR	$\leq 1.50$

**Mechanical Data**

Temperature Range: -20 °C - 100 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches

**Konnect RF**WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD177178**

DESCRIPTION

**Power Divider, Resistive, 6 Way, SMA Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.**Component**Body  
Conectors**Material**Aluminum  
Brass**Plating**Nickel  
Nickel