

PART NUMBER

KPD177222

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency	10-40 GHz
Insertion Loss	1.5dB max
Isolation	15dB min.
Amplitude Balance	0.4dB max.
Phase Balance	4°
V.S.W.R	1.60 max.
Forward Power	20 Watts

RoHS Compliant**Mechanical Data**

Temperature Range: -35 °C - 85 °C

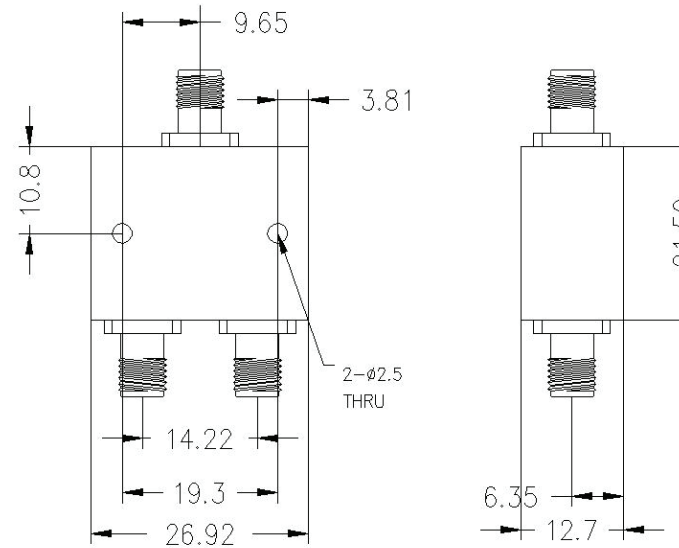

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KPD177222

DESCRIPTION

Power Divider, 2 Way, 2.92 Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.