

PART NUMBER

**KPD177229**

REV.

DATE

COMMENTS


INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency	0.5-26.5 GHz
Insertion Loss	2.4dB max
Isolation	17dB min.
Amplitude Balance	$\pm 0.4$ dB max.
Phase Balance	$\pm 4^\circ$ max.
V.S.W.R	1.60 max.
Forward Power	10 Watts

**RoHS Compliant****Mechanical Data**

Temperature Range: -35  $^\circ$ C - 85  $^\circ$ C

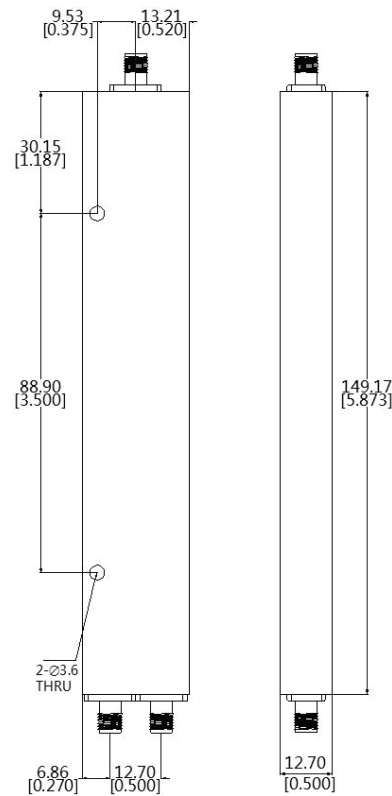

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KPD177229**

DESCRIPTION

**Power Divider, 2 Way, 2.92 Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.